


D-SUB Straight Type

GXCON

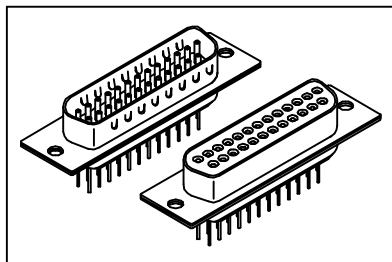

Material:

Housing: 30% Glass filled PBT UL94V-0.

Contacts: Brass.

Plating: Gold plated.

Electrical Characteristics:

Current Rating: 1 AMP.






Insulator Resistance: 5000MΩmin. at DC 500V.

Contact Resistance: 20mΩmax. at DC 100mA.

Operating Temperature: -55°C~+105°C.

Features:

* UL cUL Listing.

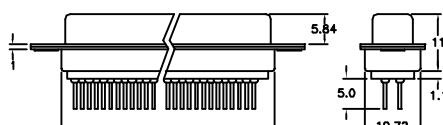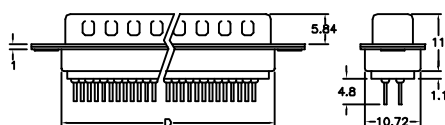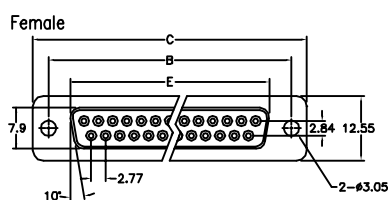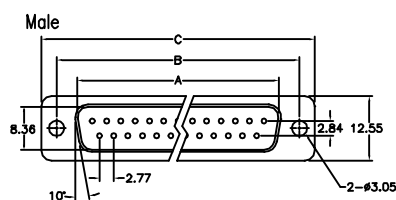

Position	Dimension				
	A	B	C	D	E
9	16.92	24.99	30.81	19.28	16.33
15	25.25	33.32	39.14	27.51	24.66
25	38.96	47.04	53.04	41.30	38.38
37	55.42	63.50	69.32	57.71	54.84

Ordering information

DB04- 37 M I U 3 N1
 Series Position M: Male T: Tin Shell U: Blue C: Selective Gold Plated Blank: Standard Type
 F: Female E: Zinc Shell B: Black N1: See Page B52
 W: White