**Material:**

Housing: High temperature housing UL94V-0 withstands IR and VPR soldering methods.

Contacts: Phosphor Bronze.

Leg: Brass.

Plating: Tin plated.

Electrical Characteristics:

Current Rating: 0.5 AMP.








Insulator Resistance: 100MΩmin. at DC 500V.

Contact Resistance: 20mΩmax. at DC 100mA.

Operating Temperature: -55°C~+85°C.

Features:

- * FFC/FPC Connection, Double Contact, Right angle, Straight and SMD type.
- * Size 3 through 32 available.
- * For 0.30mm(0.0118") thick FFC/FPC.

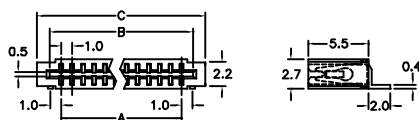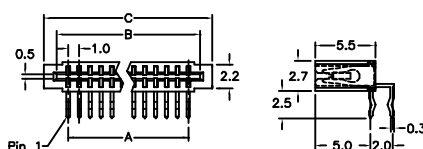

Position	3 Thru 32
Dimension	
A	(No. of Positions X 1.0)-1.0
B	(No. of Positions X 1.0)+1.2
C	(No. of Positions X 1.0)+2.5

Ordering information

FC11- 32 2 1
 Series No. of Pin Count 2: Tin Plated 1: Straight
 2: Right Angle
 3: S.M.D. Type