


FFC/FPC Connector 1.25mm(0.049") ZIF Type

GXCON

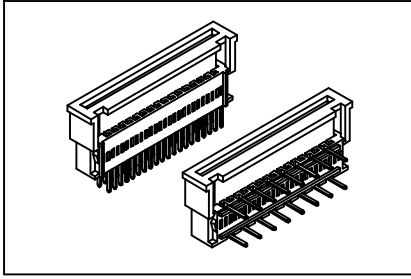

Material:

Housing: 30% Glass filled PBT UL94V-0.

Contacts: Phosphor Bronze.

Plating: Tin plated.

Electrical Characteristics:

Current Rating: 1 AMP.






Insulator Resistance: 5000MΩmin. at DC 500V.

Contact Resistance: 20mΩmax. at DC 100mA.





Operating Temperature: -55°C ~ +105°C.

Features:

- * ZIF, DIP Type.
- * Size 3 through 40 available.
- * Straight & right angle.
- * For 0.30mm(0.0118") thick FFC/FPC.

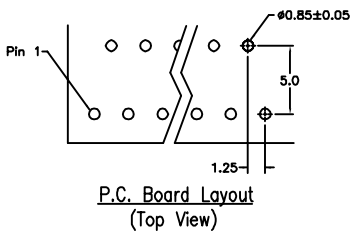

FFC/FPC Dimension
Thickness 0.3±0.05mm

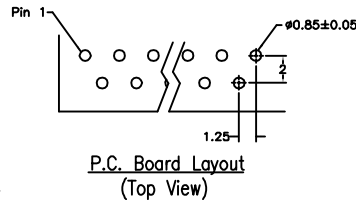

Position	3 Thru 40
Dimension	
A	(No. of Positions X 1.25)+5.7
B	(No. of Positions X 1.25)+1.57

Ordering information

FC22- 40 2 S
Series No. of Pin Count 2: Tin Plated S: Top Entry (Straight)
R: Side Entry (Right Angle)