

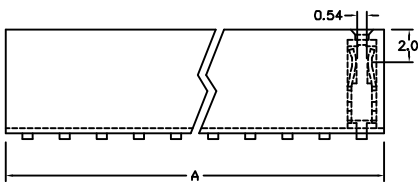
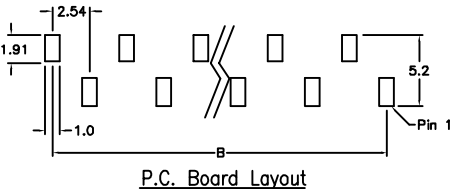
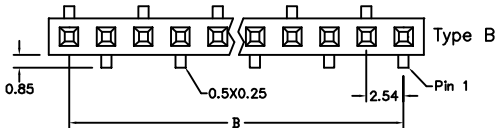
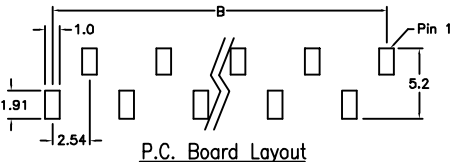


- Features:**
- * NOW available in Surface Mount.
 - * Low profile 7.10mm (0.280").
 - * Two choices of foot print.
 - * Dual beam contacts offer ultimate performance.

Material:
Housing: High temperature housing withstands IR and VPR soldering methods.
Contacts: Phosphor Bronze.
Plating: Gold plated over nickel.
Tin plated over nickel.
Electrical Characteristics:
Current Rating:1 AMP.
Insulator Resistance:5000MΩmin. at DC 500V.
Contact Resistance: 20mΩmax. at DC 100mA.
Operating Temperature: -65°C ~+125°C .
Max Processing Temperature: 230°C for 30~60 seconds.

Mechanical Characteristics:
Insertion Force:140g avg.(0.64mm sq. pin)
Withdrawal Force: 114g avg.(0.64mm sq. pin)

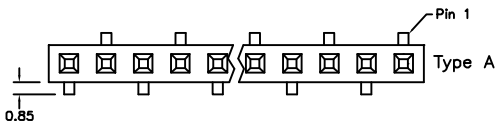

Position	3 Thru 40
Dimension	
A	2.54 X No. of Positions
B	2.54 X No. of Positions -2.54

Ordering information

PS04- 1 40 1 3 A
Series Single Row No. of Pin Per Row 1: Gold Plated 3: Surface Mount *A: Type A
2: Tin Plated *B: Type B

* Pick & Place Pad Available Upon Request.